
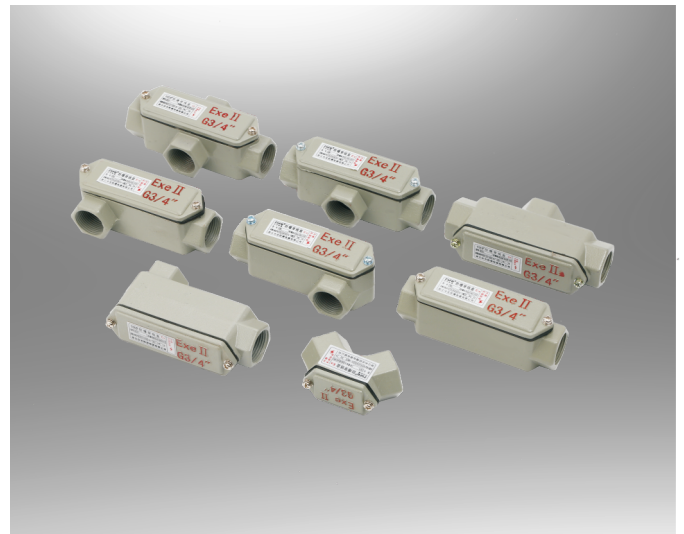


适用范围

- ◆ 广泛应用于石油开采、炼油、化工、军工等危险环境场所作为电线、电缆管路连接弯曲之用。
- ◆ 适用于爆炸性气体环境1区、2区场所。
- ◆ 适用于可燃性粉尘环境20区、21区、22区场所。
- ◆ 适用于IIA、IIB、IIC类爆炸性气体环境。

型号含义

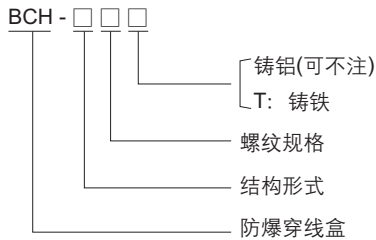



产品特点

- ◆ 铸铝合金或铸钢外壳，表面高压静电喷塑。
- ◆ 外壳材质有铝合金和铸钢两种形式。
- ◆ 结构形式多样，便于安装。

主要技术参数


防爆标志	防护等级	结构形式
Exe II C Gb/Ex tD A21	IP65	A、B、C、D、E、F、G、H

外形安装尺寸




进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-A1/2□	105	31	41
3/4	20	BCH-A3/4□	125	37	46
1	25	BCH-A1□	139	46	54
1 1/4	32	BCH-A1 1/4□	182	54	65
1 1/2	40	BCH-A1 1/2□	176	60	71
2	50	BCH-A2□	204	72	83
2 1/2	70	BCH-A2 1/2□	246	86	104
3	80	BCH-A3□	282	102	120
4	100	BCH-A4□	300	120	135


进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-B1/2□	105	47	41
3/4	20	BCH-B3/4□	125	52	46
1	25	BCH-B1□	139	62	54
1 1/4	32	BCH-B1 1/4□	182	71	65
1 1/2	40	BCH-B1 1/2□	176	80	71
2	50	BCH-B2□	204	93.5	83
2 1/2	70	BCH-B2 1/2□	246	121	104
3	80	BCH-B3□	282	137	120
4	100	BCH-B4□	300	145	135




进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-C1/2□	105	62	41
3/4	20	BCH-C3/4□	125	66	46
1	25	BCH-C1□	139	79	54
1 1/4	32	BCH-C1 1/4□	182	88	65
1 1/2	40	BCH-C1 1/2□	176	100	71
2	50	BCH-C2□	204	115	83
2 1/2	70	BCH-C2 1/2□	246	156	104
3	80	BCH-C3□	228	172	120
4	100	BCH-C4□	300	180	135




进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-D1/2□	98	47	41
3/4	20	BCH-D3/4□	117	52	46
1	25	BCH-D1□	129	62	54
1 1/4	32	BCH-D1 1/4□	129	63	65
1 1/2	40	BCH-D1 1/2□	165.5	80	71
2	50	BCH-D2□	194	90.3	83
2 1/2	70	BCH-D2 1/2□	211	121	104
3	80	BCH-D3□	247	137	120
4	100	BCH-D4□	275	145	135




进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-E1/2□	98	47	41
3/4	20	BCH-E3/4□	117	52	46
1	25	BCH-E1□	129	62	54
1 1/4	32	BCH-E1 1/4□	129	63	65
1 1/2	40	BCH-E1 1/2□	165.5	80	71
2	50	BCH-E2□	194	90.3	83
2 1/2	70	BCH-E2 1/2□	211	121	104
3	80	BCH-E3□	247	137	120
4	100	BCH-E4□	275	145	135

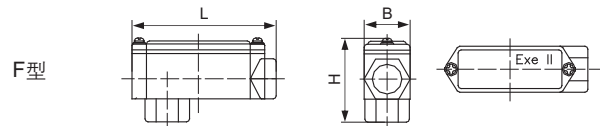

进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-F1/2□	98	31	57
3/4	20	BCH-F3/4□	117	37	64
1	25	BCH-F1□	130	46	71
1 1/4	32	BCH-F1 1/4□	162.5	54	81
1 1/2	40	BCH-F1 1/2□	165.5	60	91
2	50	BCH-F2□	194	72	105
2 1/2	70	BCH-F2 1/2□	211	86	139
3	80	BCH-F3□	247	102	155
4	100	BCH-F4□	275	120	160

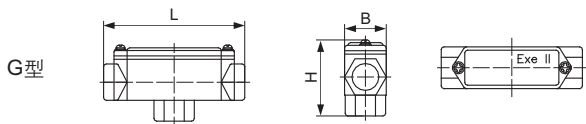

进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-G1/2□	105	31	57
3/4	20	BCH-G3/4□	125	37	64
1	25	BCH-G1□	139	46	71
1 1/4	32	BCH-G1 1/4□	170	54	81
1 1/2	40	BCH-G1 1/2□	176	60	91
2	50	BCH-G2□	204	72	105
2 1/2	70	BCH-G2 1/2□	246	86	139
3	80	BCH-G3□	282	102	155
4	100	BCH-G4□	300	120	160



进线口螺纹 (G")	管子内径 (mm)	铸铝型号	外形尺寸(mm)		
			L	B	H
1/2	15	BCH-H1/2□	69	27	43
3/4	20	BCH-H3/4□	81	33	48
1	25	BCH-H1□	100	40	60
1 1/4	32	BCH-H1 1/4□	120	49	84
1 1/2	40	BCH-H1 1/2□	130	57	71
2	50	BCH-H2□	168	70	83
2 1/2	70	BCH-H2 1/2□	246	86	104
3	80	BCH-H3□	282	102	120
4	100	BCH-H4□	300	102	135